


One Hub For All Your Needs

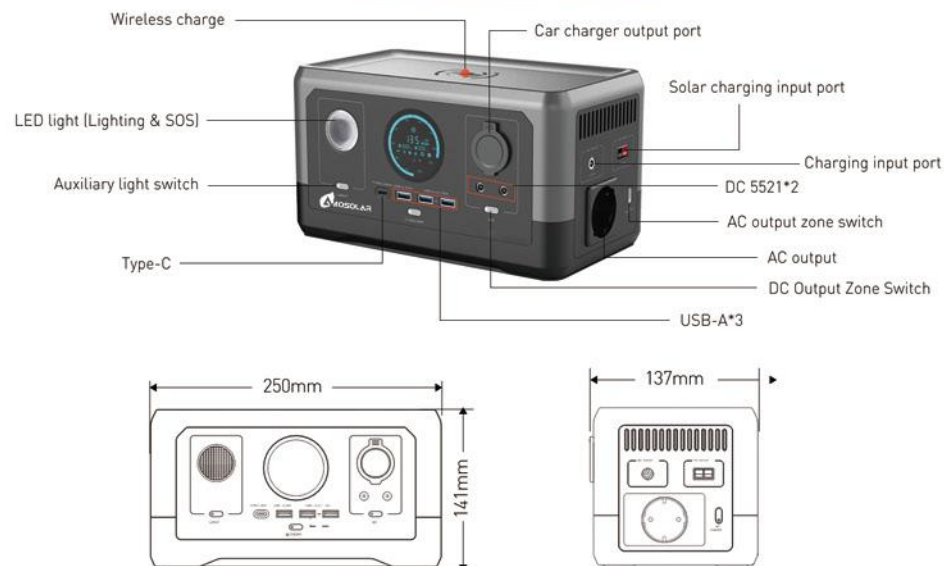

SPECIFICATIONS

Amo Technical parameters

Model:	AMO 300W	Capacity:	285Wh 14.8 V
AC Output (x1):	300W AC Output Socket	DC Charger Input Power:	Charge 100W MAX
USB-C Output (x1):	5V/9V/12V/15V 3A 45W MAX	Solar Charge PV Input:	11-30V 100W MAX
USB-A Output (x3):	5V/9V/12V 24W MAX(x1) 5V 2.5A 13W MAX(x1)	DC Charger Input Voltage:	220~240VAC
DC 5521 Output (x2):	11-16.8V 3A MAX	PACK:	4S4P(4.8Ah*3.7V)
Cigarette lighter :	134W 11-16.8V 8A MAX	Life Span:	800 Cycles 80%
Discharge Temperature:	-10°C ~ 60°C	Cell Type:	NCM 21700
Charge Temperature:	0°C - 45°C	Size:	250x141x137 mm
		N.W:	2.9kg

Amosolar Co.,Ltd

Address: No.210, Qianshan Road, Shushan District, Hefei City, Anhui Province, China

Tel: +86 13956933621

Email: info@amo-solar.com

Web: www.amosolarpv.com




Your EXPERT Portable Power Station

Powerful Capacity & Output


300W Power Output



The Fastest Charging Speed

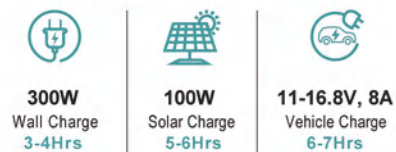

The Most Versatile Ports

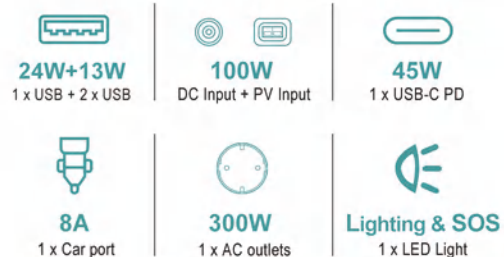

Wireless Charging



Power Wherever You Need


Outdoor Adventure

For campers, explorers, RV dwellers



Home & Emergency Backup

For professionals and emergency preppers



What's In Box



Available plugs

